


Vitrum II BS Rolldown Shutters and Curtains Control Wireless



Datasheet

cod. 02B020011

vitrum.com

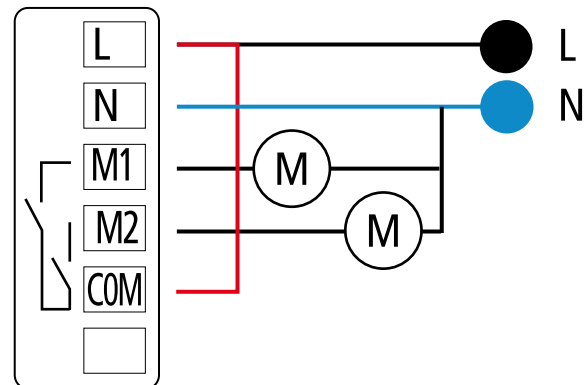

certified product

FUNCTIONAL SPECIFICATION

- Two-button for control of rolldown shutters and curtains
- Touch control with capacitive technology and concave surface for tactile Feedback
- Acoustic feedback signal
- Crown backlit by low-consumption LEDs

COMMAND MODE

- Two capacitive button with "On-Off" control: Up-Down - Open-Close

MECHANICAL CHARACTERISTICS

- Box British 1 Gang wall or plasterboard
- Dimension: 95x95mm
- Depth at sight: 8 mm
- Operating temperature: 0-40°C
- Button Diameter: 16 mm
- Light ring diameter: 20 mm
- Weight: 220 g.

ELECTRICAL CHARACTERISTICS

- Power: 230V ac
- Energy consumption: < 1W
- Configuration: 3 wires
- Relè OMRON I MAX 2A a 230 V~
- Output >20 VA e < 800 VA for electric motor
- Frequency of communication: F.M. 868.4MHz - R.F radiated power <1mW
- R.F. Range: 20 m. MAX (open field)

Built in compliant with:

CEI EN 60669-2-1

Compatibility E.M.C.: CEI EN 55015

Radio: ETS 300683

Think Simple s.r.l.

Size, color tone and characteristics of the products shown are only indicative and do not constitute any contractual bond. Think Simple s.r.l. reserves the right to modify its products at any time and without notice in order to better their quality and functionality.

HEAD OFFICE


Viale Lino Zanussi, 3
33170 Pordenone IT
T +39 0434 516216
F +39 0434 516230

ADMINISTRATIVE OFFICE

Corso Garibaldi, 86
20121 Milano IT
T +39 02 65560029
F +39 02 45498295

VITRUM II BS SATELLITE Curtains and Shutters Control Wireless

cod. 01B020060

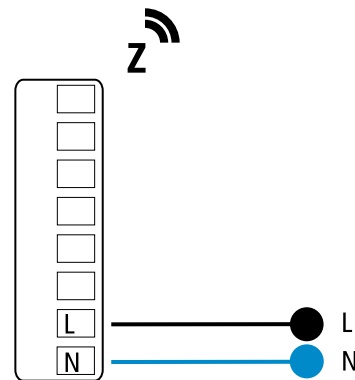

prodotto certificato  

FUNCTIONAL SPECIFICATION

- Two-Button "Satellite" control to match with a power device (e.g. cod. 02E020010 or cod. 02B020010 or cod. 01D020030)
- Touch control with capacitive technology and concave surface for tactile Feedback
- Acoustic feedback signal
- Crown backlit by low-consumption LEDs

COMMAND MODE

- Two capacitive buttons with UP/DOWN or OPEN/CLOSE control
- Time of ascent and descent of the programmable shutter from 10s to 3m
- Default: 50s
- Indication of motor drive: the device's LEDs flash
- Possibility to interpret the command "ALL OFF" total closure of the blinds
- You can associate up to 5 devices per channel

MECHANICAL CHARACTERISTICS

- Box British 1 Gang (wall or plasterboard)
- Dimension 95x95mm
- Depth at sight 8 mm
- Weight: 210 g.
- Button Diameter 16 mm
- Light ring diameter 20 mm

ELECTRICAL CHARACTERISTICS

- Power: 230V ac
- Energy consumption: < 1W
- Frequency of communication: F.M. 868.4MHz - R.F radiated power < 1mW
- R.F. Range: 20 m. MAX (open field)
- Operating Temperature 0° – 40° C
- Compliant with: **E.M.C.** : 2004/108/CE
R&TTE : 1999/5/CE